



CSM (HYPALON) RUBBER SHEET

65 Duro | Chemical Resistant | Heat Resistant | CSM Rubber

FEATURES

Reglin CSM (Hypalon) Rubber is a black, flexible, premium grade, 65 Duro, Corrosion resistant CSM rubber sheet which has high temperature resistance and chemical resistance to acids and alkalis. It has low fluid and gas permeability and is UV stable and is resistant to ozone effects and extreme weather conditions.

CSM (Hypalon) Rubber Sheet has good physical and flame resistant properties, making it suitable for electrical sealing applications.

TECHNICAL INFORMATION


Polymer	CSM	
Colour	Black	
Specific Gravity	1.3	ASTM D297
Hardness	65° ± 5° Shore A	ASTM D2240
Tensile Strength	9 MPa (min)	ASTM D412
Elongation @ Break	350% (min)	ASTM D412
Tear Strength	20 N/mm (min)	ASTM D624
Temperature Range	-25°C to +120°C	

AVAILABLE SIZES

STANDARD THICKNESS 1.5mm, 3mm, 6mm

STANDARD ROLL SIZE 1200mm x 10mtrs

Cut lengths, strips and custom shapes are available upon request

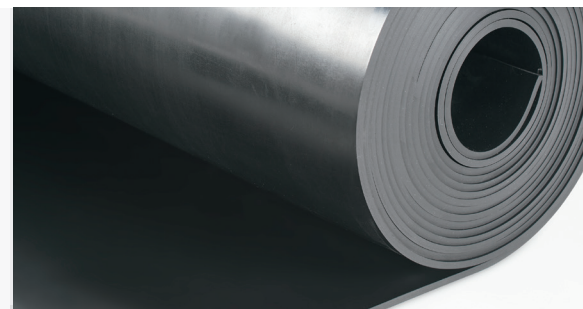

APPLICATIONS

Reglin CSM (Hypalon) Rubber Sheet has been designed primarily for use as a flexible strip, pad, lining or gasket and is mainly used for Sealing, Insulating, Isolating and Protecting steel or other surfaces.

Its properties make it suitable for use in a wide range of applications including:

- > Flange gaskets on pipes and tanks
- > Lining of pipes and tanks
- > Transfer and joining sleeves
- > Weatherproof flashing
- > Insulating strip
- > Isolation barriers
- > Splash guards and covers