



ENDURANCE RECYCLED RUBBER FLOORING

Anti-Slip | High Density | Polyurethane Bound Rubber Flooring

FEATURES

Reglin Endurance Recycled rubber flooring is a premium grade, black with coloured fleck, high density polyurethane bound SBR crumb rubber matting designed for use as a non slip flooring.

Endurance Recycled Rubber Flooring is independently tested and meets VOC Emissions certification Office Design IEQ-13 and Office interiors IEQ-11 making it suitable for use in indoor applications. It is also UV stable and is resistant to ozone effects and weathering, making it also suitable for use outdoor.

For permanent installation Endurance Recycled Rubber Flooring can be bonded to surfaces using a Polyurethane adhesive. To achieve ultimate bond strength Holdfast 451, 2 part polyurethane adhesive is recommended.


TECHNICAL INFORMATION

Polymer	SBR	
Colour	Black	
Density	1000 kg/m ³	
Hardness	55° ± 5° Shore A	ASTM D2240
Tensile Strength	3.5 MPa (min)	ASTM D412
Slip Resistance	Wet Pendulum - Class X Dry Pendulum - Class F	

AVAILABLE SIZES

STANDARD THICKNESS 4.0mm, 7.0mm

STANDARD ROLL SIZE 1100mm x 10mtrs

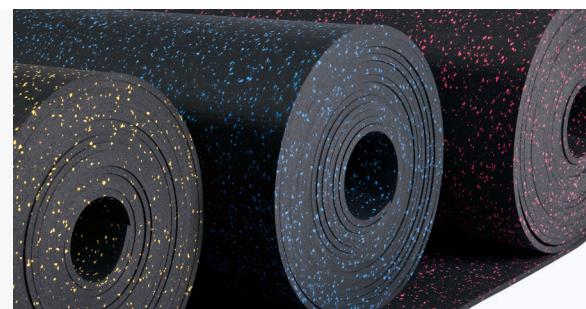

APPLICATIONS

Reglin Endurance Recycled Rubber Flooring is designed primarily for use as an anti-slip rubber matting in general purpose applications. Typical applications where it can be used include:

- > Industrial floor matting
- > Anti-slip safety matting
- > Anti-fatigue matting
- > Gym floor matting
- > Sound insulation and acoustic control floor matting
- > Flooring underlay