



NATURAL 60 RUBBER SHEET

60 Duro | Moderate Abrasion & Impact Resistant | Natural Rubber

FEATURES

Reglin Natural 60 Rubber is a black, superior grade, 60 Duro blended Natural and Synthetic rubber sheet. It has good physical properties such as mechanical and tear strength and has moderate abrasion resistance making it suitable for general insulating or isolating and gasket sealing applications.

TECHNICAL INFORMATION


Polymer	NR/SBR	
Colour	Black	
Specific Gravity	1.35	ASTM D297
Hardness	65° ± 5° Shore A	ASTM D2240
Abrasion	300 mm ³ (max) @ 10N	ASTM D5963
Tensile Strength	7 MPa (min)	ASTM D412
Elongation @ Break	350% (min)	ASTM D412
Compression Set	35%	ASTM D395 B
Tear Strength	60 N/mm (min)	ASTM D624
Temperature Range	-20°C to +70°C	

AVAILABLE SIZES

STANDARD THICKNESS 0.8mm, 1.5mm, 3mm, 4.5mm, 6mm, 9mm, 12mm

STANDARD ROLL SIZE 1200mm x 10mtrs

Cut lengths, strips and custom shapes are available upon request

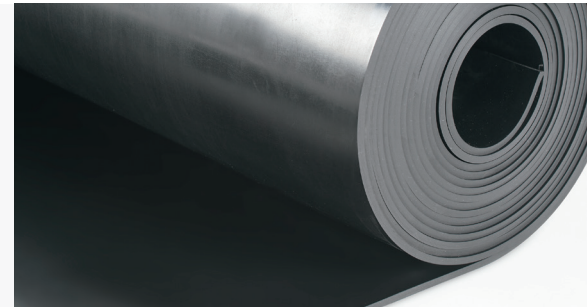

APPLICATIONS

Reglin Natural 60 Rubber Sheet has been designed primarily for use as a flexible strip, pad, lining or gasket and is mainly used for Sealing, Insulating, Isolating and Protecting, steel or other surfaces. Its properties make it suitable for use in a wide range of applications including:

- > Flange gaskets on pipes and tanks
- > Insulating strip
- > Isolation barriers
- > Dust seals and covers
- > Variety of sealing applications