


# SAR 60 Rubber Sheet

SAR 60 is a premium grade wear and impact resistant 60 Duro rubber sheet.

## FEATURES

SAR 60 Rubber Sheet is made from a highly elastic premium rubber compound and will display excellent resistance to sliding abrasion and large particle impact.

SAR 60 has excellent physical properties including cut and tear resistance. It will also display resistance to some mild chemicals, including acids and alkalis used in mineral processing. It has good ozone/UV resistance making it suitable for outdoor use.

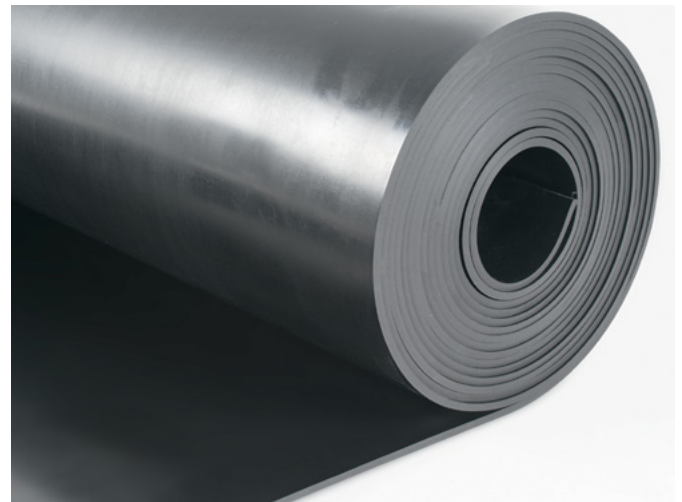

## TECHNICAL INFORMATION

Polymer	NR/BR	
Colour	Black	
Specific Gravity	1.10	ASTM D297
Hardness	60° ± 5° Shore A	ASTM D2240
Tensile Strength	17 MPa (min)	ASTM D412
Elongation @ Break	450% (min)	ASTM D412
Abrasion	60mm <sup>3</sup> (max) @ 10N	ASTM D5963
Temperature Range	-20°C to + 70°C	
Tear Strength	80 N/mm (min)	ASTM D624

## AVAILABLE SIZES

Reglin stock SAR 60 Rubber Sheet in a range of standard thicknesses and roll sizes. It can also be supplied in cut lengths, strips, pads and a wide variety of custom cut shapes and gaskets to suit your application requirements.

<b>PART NO.</b>	<b>SIZE</b>	<b>WEIGHT (PER L/M)</b>
SAR03	3mm x 1200mm (10 L/M Rolls)	4 kgs
SAR04.5	4.5mm x 1200mm (10 L/M Rolls)	6 kgs
SAR06	6mm x 1200mm (10 L/M Rolls)	7.8 kgs
SAR10	10mm x 1200mm (10 L/M Rolls)	13.2 kgs
SAR101500	10mm x 1500mm (10 L/M Rolls)	16.5 kgs
SAR12	12mm x 1200mm (10 L/M Rolls)	15.9 kgs
SAR121500	12mm x 1500mm (10 L/M Rolls)	19.8 kgs
SAR161500	16mm x 1500mm (10 L/M Rolls)	26.4 kgs
SAR191500	19mm x 1500mm (10 L/M Rolls)	31.4 kgs
SAR251500	25mm x 1500mm (10 L/M Rolls)	41.3 kgs
SAR501800	50mm x 1800mm (10 L/M Rolls)	99.1 kgs