

Sandwich Skirting Rubber

Reglin Sandwich Skirting Rubber is a flexible wear resistant multi layered 40 and 60 Duro rubber designed for use as a conveyor sealing skirt.


FEATURES

Sandwich Skirting Rubber is made from a combination of highly elastic premium rubber compounds. It features a green soft and flexible 40 Duro abrasion resistant centre core and black 60 Duro wear and impact resistant outer layers.

Sandwich Skirting Rubber has excellent physical properties including cut and tear resistance. It features a beveled edge and is designed to adjust above the conveyor belt and create a firm seal once adjusted.

Sandwich Skirting is rigid enough to create a solid impact resistant sealing skirt which reduces both material spillage and dust escaping. This will pro-long the life of the skirt and also minimizes the potential of wear and damage to the conveyor belt and surrounding structure.

Sandwich Skirting Rubber can be supplied in full rolls or pre-cut skirting rubber strips to suit standard conveyor system designs, ready for easy installation.

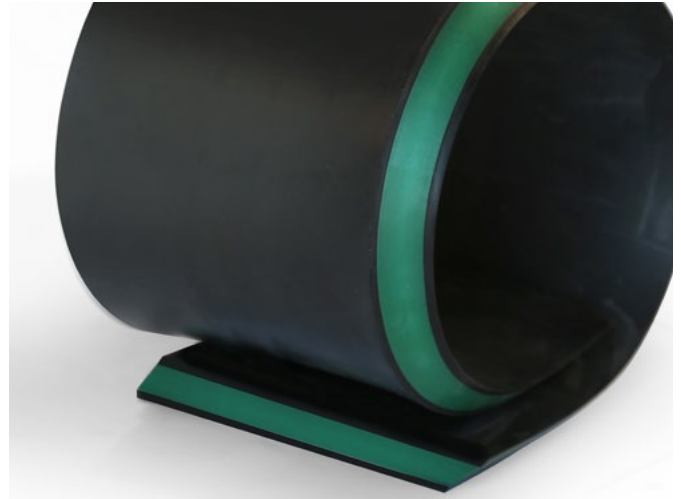

TECHNICAL INFORMATION

CENTRE CORE LAYER		
Polymer	NR	
Colour	Green	
Specific Gravity	1.07	ASTM D297
Hardness	40° ± 5° Shore A	ASTM D2240
Tensile Strength	20 MPa (min)	ASTM D412
Elongation @ Break	600% (min)	ASTM D412
Abrasion	120 mm ³ (max) @ 5N	ASTM D5963
Temperature Range	-20°C to +70°C	
Tear Strength	50 N/mm (min)	ASTM D624

TECHNICAL INFORMATION (CONT.)

OUTER LAYERS		
Polymer	NR	
Colour	Black	
Specific Gravity	1.13	ASTM D297
Hardness	65° ± 5° Shore A	ASTM D2240
Abrasion	80 mm ³ (max) @ 10N	ASTM D5963
Tensile Strength	17 MPa (min)	ASTM D412
Elongation @ Break	350% (min)	ASTM D412

AVAILABLE SIZES

Reglin stock Sandwich Skirting Rubber in a standard thickness and roll size. It can be custom cut and supplied in any strip width with 45 degree bevels on both sides.

PART NO.	SIZE	WEIGHT (PER L/M)
CSR201500	20mm x 1500mm (30 L/M Rolls)	33.7 kgs