

Ventilated Natural Nylon Insertion Rubber Sheet


Reglin Ventilated Natural Nylon Insertion Rubber Sheet is a superior grade 65 Duro natural rubber sheet with nylon reinforcement and holes.

FEATURES

Reglin Ventilated Natural Nylon Insertion Rubber Sheet is made from a blended natural rubber compound. It features ventilation holes to reduce its weight and allow air flow.

Ventilated Natural Nylon Insertion is reinforced with a high strength nylon fabric which gives excellent cut and tear strength.

Ventilated Insertion has good physical properties and is extremely tough. It has ozone/UV resistance making it weather resistant and suitable for outdoor use.

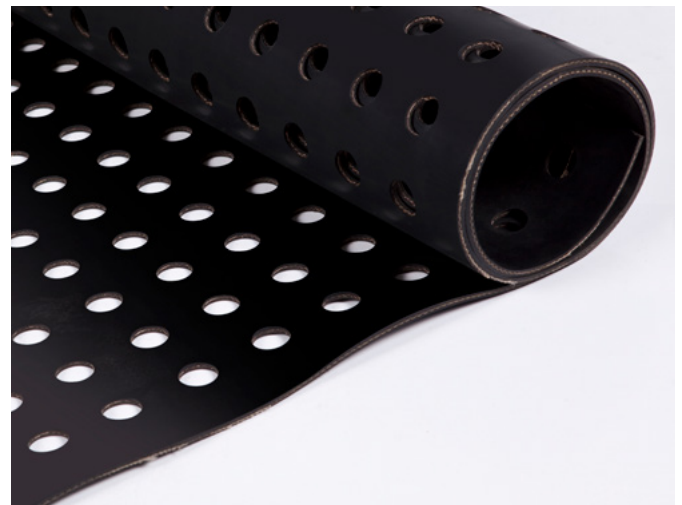

TECHNICAL INFORMATION

Polymer	NR/SBR	
Colour	Black	
Reinforcement	Heavy Duty Nylon	
Specific Gravity	1.55	ASTM D297
Hardness	65° ± 5° Shore A	ASTM D2240
Tensile Strength	3.5 MPa (min)	ASTM D412
Elongation @ Break	250% (min)	ASTM D412
Temperature Range	0°C to +65°C	

AVAILABLE SIZES

Reglin stock Ventilated Natural Nylon Insertion Rubber Sheet in a standard thicknesses and roll size. It can also be supplied in cut lengths to suit your application requirements.

PART NO.	SIZE	WEIGHT (PER L/M)
CNNR141000	4mm x 1000mm with Holes (20 L/M Rolls)	3.5 kgs