

Rubber Stud Flooring


Reglin Rubber Stud flooring is a premium grade profiled rubber mat designed for use as a floor covering in high traffic areas.

FEATURES

Reglin rubber stud flooring is made from a premium synthetic rubber compound and will display good physical properties including wear and impact resistance.

Endurance rubber mat is available in a range of colours.

Rubber Stud flooring features a stud profile finish on its top surface to ensure it is non-slip in both wet and dry conditions. It also has a textured finish on the underside to allow for easy bonding to substrates.

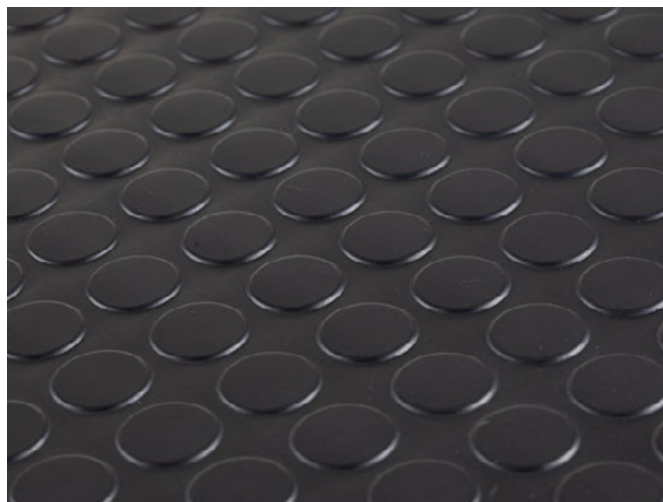

TECHNICAL INFORMATION

Polymer	SBR	
Colour	Black, Blue and Grey	
Specific Gravity	1.6	ASTM D297
Hardness	80° ± 5° Shore A	ASTM D2240
Tensile Strength	5.0 MPa (min)	ASTM D412
Elongation @ Break	250% (min)	ASTM D412
Abrasion	500mm ³	ASTM D5963
Temperature Range	0°C to +65°C	
Tear Strength	15Kg/cm	ASTM D624

AVAILABLE SIZES

Reglin stock Rubber Stud Flooring in an industry standard thickness and roll size in a range of colours.

PART NO.	DESCRIPTION	WEIGHT (PER L/M)
ST31200B	3mm x 1200mm (10 L/M Rolls)	5.8 kgs
ST31200BLUE	3mm x 1200mm (10 L/M Rolls)	5.8 kgs
ST31200G	3mm x 1200mm (10 L/M Rolls)	5.8 kgs