

Conti Tie Gum (Skim Rubber)

Conti Tie Gum is an uncured rubber designed for use as skim rubber in conveyor belt splicing.


FEATURES

Conti Tie Gum is an uncured rubber sheet designed for use in hot splicing and repairs of conveyor belts.

It is designed to be used as a skim rubber replacement and will enhance working life of splices and repairs.

Conti Tie Gum will improve flexibility and strength of conveyor belt splices in service. Consult conveyor belt manufacturer specifications for rubber cure times.

Australian Manufactured.

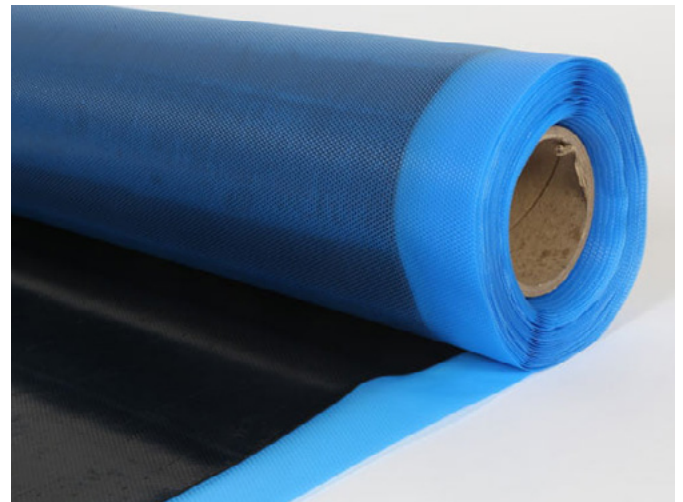

TECHNICAL INFORMATION

Polymer	NR	
Colour	Black	
Specific Gravity	1.23	
Hardness	60° ± 5° Shore A	ASTM D2240
Tensile Strength	17 MPa (min)	ASTM D412
Elongation @ Break	460% (min)	ASTM D412

All results based upon laboratory cured samples. Specification subject to change without notice.

AVAILABLE SIZES

PART NO.	DESCRIPTION	WEIGHT (PER ROLL)
UNCTG00.8	0.8mm x 500mm (10 L/M Rolls)	5 kgs
UNCTG01.6	1.6mm x 500mm (10 L/M Rolls)	9.9 kgs
UNCTG02	2mm x 500mm (10 L/M Rolls)	12.3 kgs
UNCTG03	3mm x 500mm (10 L/M Rolls)	18.5 kgs
UNCTG04	4mm x 500mm (10 L/M Rolls)	25 kgs