

Side Clamp Bars


Reglin Side Clamp Bars are a steel tensioning rail with a premium grade wear and impact resistant 60 Duro rubber lined wear face.

FEATURES

Reglin Side Clamp Bars are made from mild steel, profiled to suit your equipment design and to allow for correct tensioning of rubber screen cloths.

Reglin Side Clamp Bars are lined with a highly elastic premium rubber compound and will display excellent resistance to sliding abrasion and large particle impact.

Side Clamp Bars can be supplied custom engineered to size with counter-bored holes to suit your screen. They are suitable for both high wear and high impact screening applications.

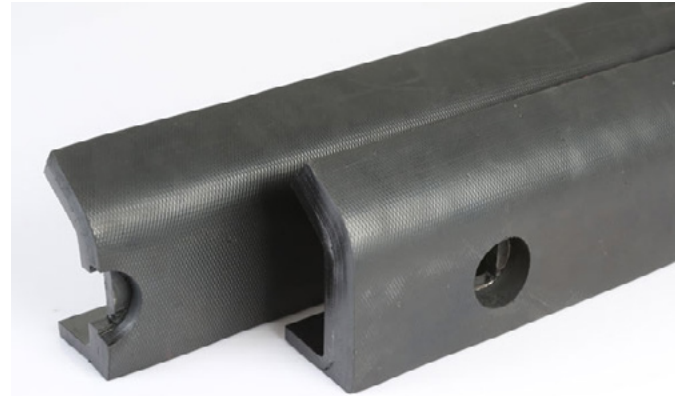

TECHNICAL INFORMATION

Polymer	NR/BR	
Colour	Black with Steel Backing	
Specific Gravity	1.10	ASTM D297
Hardness	60° ± 5° Shore A	ASTM D2240
Tensile Strength	20 MPa (min)	ASTM D412
Elongation @ Break	450% (min)	ASTM D412
Abrasion	90 mm ³ (max) @ 10N	ASTM D5963
Temperature Range	-20°C to + 70°C	
Tear Strength	80 N/mm (min)	ASTM D624

AVAILABLE SIZES

Reglin Rubber Side Clamp Bars are custom made to suit any screening equipment. They are available in a range of profiles and steel thicknesses and can include standard 10mm rubber or heavier duty thicker rubber lining.

Side Clamp Bars can be custom made to any length and width and can be supplied with counter-bored holes to suit your screen.