

Conti Cover Gum (Cover Rubber)

Conti Cover Gum is an uncured rubber designed for use as cover rubber in conveyor belt splicing.


FEATURES

Conti Cover Gum is an uncured rubber sheet designed for use in hot splicing and repairs of conveyor belts.

It is designed to be used as a cover rubber replacement and will enhance working life of splices and repairs.

Conti Cover Gum will display excellent abrasion and impact resistance, improving the strength of conveyor belt splices in service. Consult conveyor belt manufacturer specifications for rubber cure times.

Australian Manufactured.

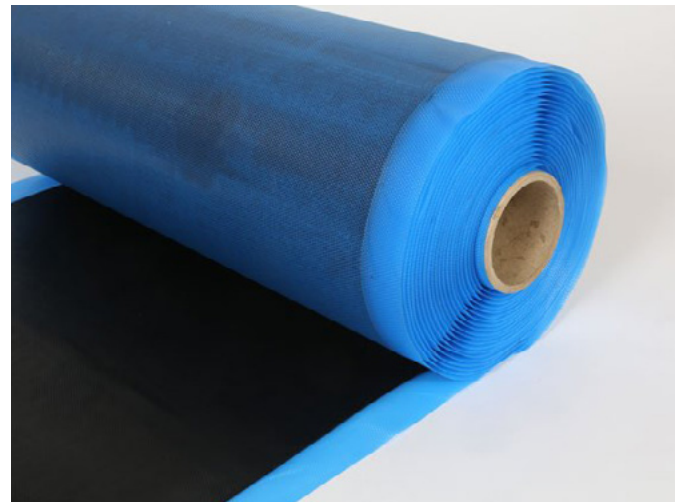

TECHNICAL INFORMATION

Polymer	NR	
Colour	Black	
Specific Gravity	1.21	
Hardness	63° ± 5° Shore A	ASTM D2240
Tensile Strength	24 MPa (min)	ASTM D412
Elongation @ Break	450% (min)	ASTM D412

All results based upon laboratory cured samples. Specification subject to change without notice.

AVAILABLE SIZES

PART NO.	DESCRIPTION	WEIGHT (PER ROLL)
UNCCG01	1mm x 500mm (10 L/M Rolls)	6.1 kgs
UNCCG01.5	1.5mm x 500mm (10 L/M Rolls)	9.1 kgs
UNCCG02	2mm x 500mm (10 L/M Rolls)	12.2 kgs
UNCCG03.2	3.2mm x 500mm (10 L/M Rolls)	19.4 kgs
UNCCG05	5mm x 500mm (10 L/M Rolls)	30.3 kgs
UNCCG06	6mm x 500mm (10 L/M Rolls)	36.3 kgs